

Grain Size Distribution

039	-106 +45 μm
041	-125 +36/45 μm

Other grain sizes on request

Chemical Composition

ZrO ₂	base
SiO ₂	< 0.1 %
TiO ₂	< 0.1 %
Fe ₂ O ₃	< 0.1 %
MgO	< 0.1 %
CaO	< 0.1 %
Y ₂ O ₃	~7.5 %
Polymer	customized


These properties are typical but do not constitute specifications

Coating Properties


- Hardness: ~ 1400HV_{0.3}
- Max. Application Temperature: 1300°C

Property Profile (Coating)

- Excellent thermal shock resistance
- More complete melting and increased porosity resulting from particle morphology and density
- Low monoclinic phase
- Low silica, high resistance to sintering
- High purity
- Low thermal conductivity
- High temperature resistance
- Good thermal shock behavior
- Low thermostatically reactivity
- Thermal expansion near superalloys
- Low monoclinic content
- Low-k materials
- Phase stable coatings

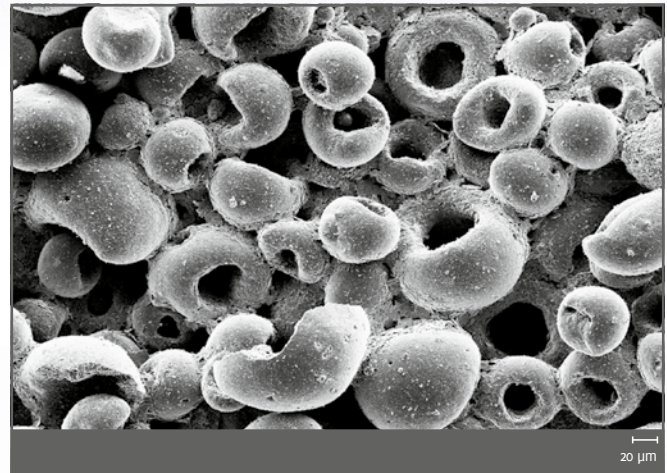

Micro section

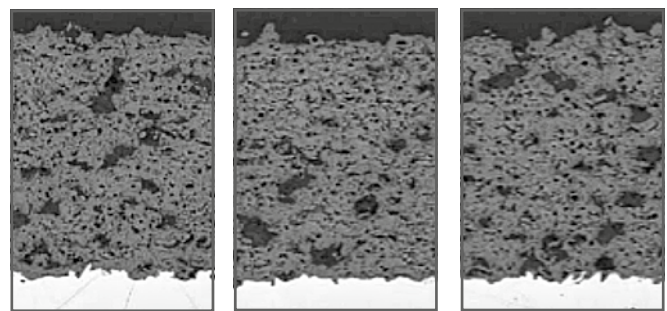

16% porosity

17% porosity

18% porosity

